


注释:


1. 材料: 紫外熔融石英 (JGS1)
2. 设计波长: 587.6nm
3. 有效焦距: $25.0 \pm 1\text{mm}$
4. 后焦距: 22.31mm
5. 镀膜: AR Coating $R_{\text{avg}} < 0.25\% @ 1550\text{nm}$ $\text{AOI} = 0^\circ$
6. 透镜定心误差: $\leq 3 \text{ arcmin}$
7. 面型不规则: $\lambda/4 @ 632.8\text{nm}$
8. 损伤阈值: 10 J/cm^2 (1542 nm, 10 ns, 10 Hz, $\varnothing 0.124 \text{ mm}$)
9. 倒角: $0.2\text{mm} \times 45^\circ$

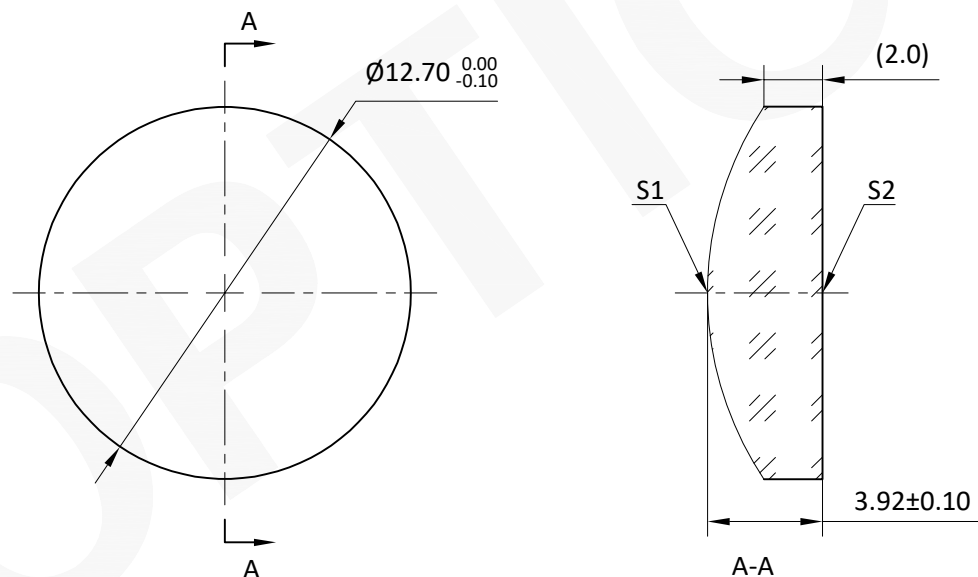

注:

- 1: 本图仅供参考, 禁止使用本图加工生产.
- 2: 图纸细节如有更改不再另行通知.

表面编号	S1	S2
形状	凸面	平面
曲率半径	11.46	无穷
通光孔径	$\geq 90\%$	$\geq 90\%$
光洁度	20-10	20-10

 GU OPTICS		联合光科（上海）技术有限公司			
名称	激光平凸透镜 D=12.70 mm F=25.0 mm V形膜：1550 nm 紫外熔融石英				
产品编号	400227	单位	mm		版本V00