
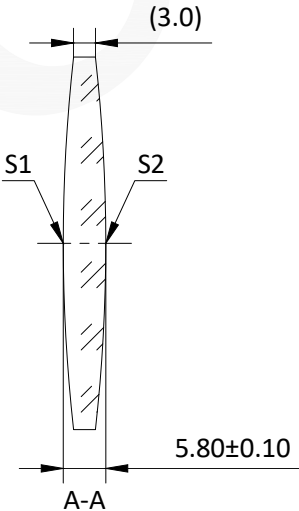


注释:

- 1. 材料: 紫外熔融石英 (JGS1)
- 2. 设计波长: 587.6nm
- 3. 有效焦距: 250.00±1%mm
- 4. 后焦距: 248.9mm
- 5. 屈光度: +4.00
- 6. 透镜定心误差: ≤3arcmin
- 7. 镀膜: AR Coating Ravg<0.25%@532&1064nm
- 8. 倒角: 0.2mmX45°
- 9. 面型不规则: λ/4 @632.8nm
- 10. 折射率: 1.458 @ 587.6 nm
- 11. 损伤阈值: 7.5 J/cm2 (532 nm, 10 ns, 10 Hz)
7.5 J/cm2 (1064 nm, 10 ns, 10 Hz)

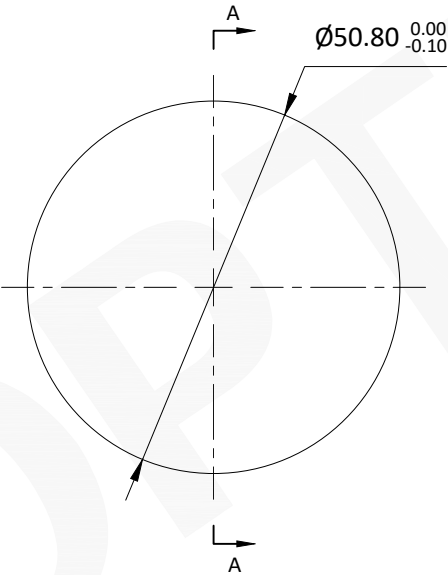

注:

- 1: 本图仅供参考, 禁止使用本图加工生产.
- 2: 图纸细节如有更改不再另行通知.

表面编号	S1	S2
形状	凸面	凸面
曲率半径	229.1	229.1
通光孔径	90%	90%
光洁度	20-10	20-10

 GU OPTICS		联合光科（上海）技术有限公司			
名称	双凸透镜 D=50.8 mm F=250 mm 532&1064 nm 紫外熔融石英				
产品编号	400368	单位	mm		版本V00