
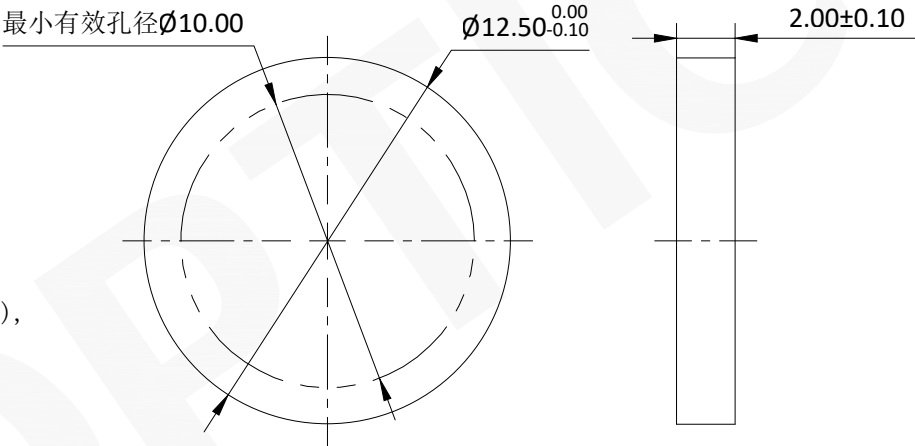


- 注释:
- 1. 材料: 紫外熔融石英 (JGS1)
 - 2. 入射角: $0 \pm 2^\circ$
 - 3. 激光波长: 532nm
 - 4. 光洁度: 60-40
 - 5. 通光孔径: $\geq 10\text{mm}$
 - 6. 边缘陡度: $0.50\%/2.7\text{nm}/93.5\text{cm}^{-1}$
 - 7. 过渡带宽: $5.3\text{nm}/186\text{cm}^{-1}$
 - 8. 边缘波长: 536.4nm
 - 9. 透过带: $T_{\text{avg}} > 93\% @ 538.9\text{--}1200\text{nm}$
 - 10. 截止带1: $OD_{\text{abs}} > 6 @ 532\text{nm}$
 - 11. 截止带2: $OD_{\text{avg}} > 6 @ 430\text{--}532\text{nm}$ (typical)
 - 12. 激光损伤阈值: $0.5 \text{ J/cm}^2 @ 266\text{nm}$ (10ns pulse width),
 $1 \text{ J/cm}^2 @ 532\text{nm}$ (10ns pulse width)



- 注:
- 1: 本图仅供参考, 禁止使用本图加工生产.
 - 2: 图纸细节如有更改不再另行通知.

 GU OPTICS		联合光科（上海）技术有限公司			
名称	陡长波通滤光片 Φ12.5mm 激光波长=532nm				
产品编号	208663	单位	mm		版本V01